


200W PROFILE ZOOM LIGHT MANUAL



1. illustrate part:

E

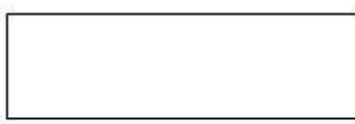

A B C D

- A. FUNCTION
- B. UP
- C. DOWN
- D. ENTER

2. Operation instructions: Press function keys A will circulate 11 different functional effects, and the first two digits of the digital tube represent the current function (reference meter). The latter two digits represent the. The address code, speed, mode, and parameters of this function. Press B or C to modify the parameter value. Press the D key to confirm.

3. Digital display window function control table: (All functions are selected and then press D key to confirm saving)

1	d001	5-channel B.C key to subtract the address code value (001-512)
2	L000	Color 1 manually dimming 000-255
3	H000	Color 2 Manual Lighting 00-255
4	P000	Frequent 000-255
5	F000	Manual focus 000-255
6	T00C	Current work temperature 000-255
7	EP-1	Keep the signal 0/1
8	DP-1	Choose the screen 0/1
9	DISP	Display backward selection

5、DMX channel function introduction (.6ch):

CH	FUNCTION	FUNCTION CONTROL
CH1	Always lit	0: Close 1-255 Light adjustment
CH2	Flash effect	0-9: Close 10-255 from slow to fast
CH3	Color 1	0: Close 1-255 Light adjustment
CH4	Color 2	0: Close 1-255 Light adjustment
CH5	focusing	0: Close 1-255 focus
CH6	Restoration	255

6. Point holding point:

The operation is very simple, the humanized design, the phenomenon of lighting without flashing shake, and so on. Can adapt to photography, photography, TV stations, etc.