


Symphony RGB Engine round jet turbine stage club Fan



1. Graphical part

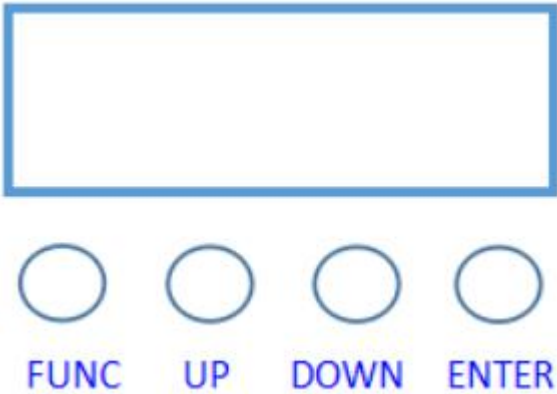

Operating instructions: Press the function key FUNC to cycle out 8 different function effects (refer to the function table), UP and DOWN adjust the value size, ENTER to confirm and save.

2. LED display window function comparison table

No.	Display	function
1	A001	Dmx address (001-512)
2	CH-8 CH-5	8CH 5CH
3	Tr00-28	Effect selection (0-28)
4	Tu00-99	Effect speed (0-99)
5	P050	0 stop 1-127 forward rotation from slow to fast 128 stop 129-255 Reversal from slow to fast
6	R255	Red (manual control)
7	G255	Green (manual control)
8	B255	Blue (manual control)

3. DMX512 8CH

Channel number	Channel function	Channels	Function description
Channel 1	Total dimming	Total Dimming	Total dimming
Channel 2	Strobe	0-255	Stroboscopic speed from slow to fast
Channel 3	Function selection	0-5 6-14 15-22 ... 247-255	No effect Effect 1 Effect 2 ... Effect 28
Channel 4	Function speed	Function speed	Stroboscopic speed from slow to fast
Channel 5	motor control	0 1-237 128 129-255	Stop Forward rotation from slow to fast Stop Reversal from slow to fast
Channel 6	Red dimming	0-255	Linear dimming, from dark to bright
Channel 7	Green dimming	0-255	Linear dimming, from dark to bright
Channel 8	Blue dimming	0-255	Linear dimming, from dark to bright

4. DMX512 5CH

Channel number	Channel function	Channels	Function description
Channel 1	Total dimming	Total Dimming	Total dimming
Channel 2	Strobe	0-255	Stroboscopic speed from slow to fast
Channel 3	Function selection	0-5 6-14 15-22 ◦ ◦ ◦ 247-255	No effect Effect 1 Effect 2 Effect 28
Channel 4	Function speed	Function speed	Function speed, from slow to fast
Channel 5	motor control	0 1-237 128 129-255	Stop Forward rotation from slow to fast Stop Reversal from slow to fast