


LP-261 18x4in1 flat indoor led par

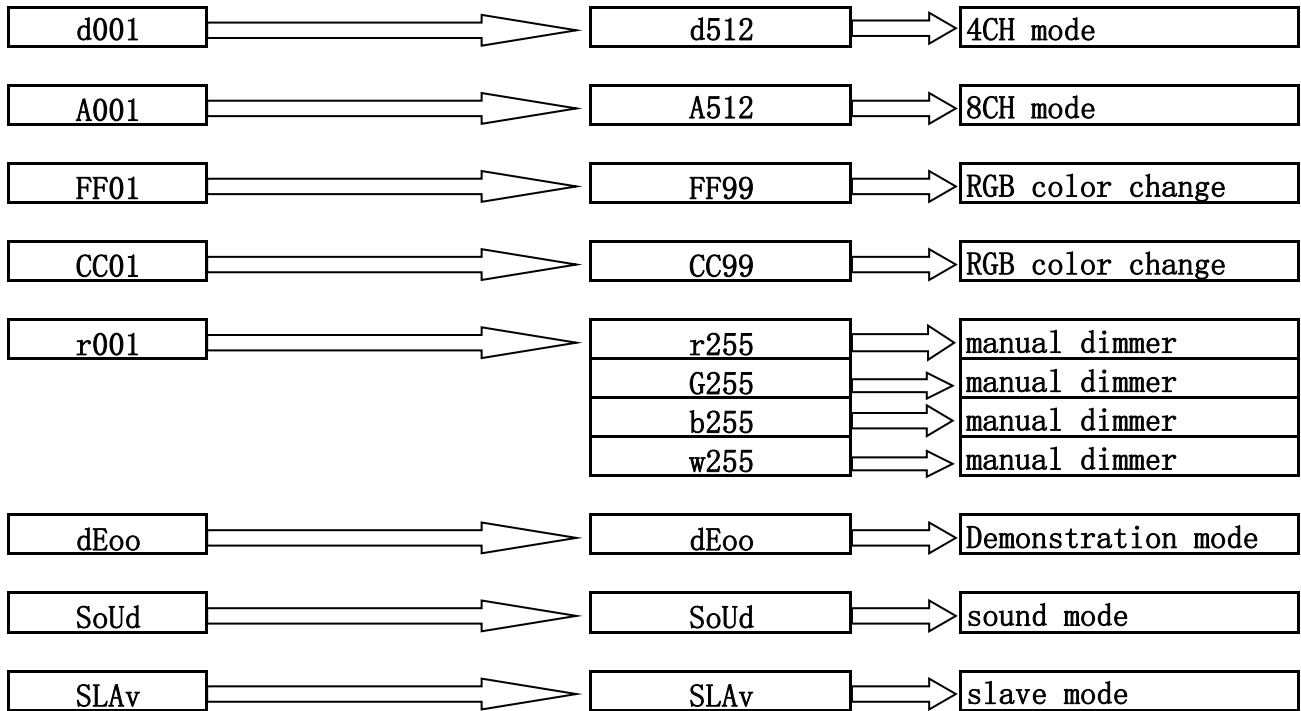

Channel modes

4CH		
CH	Channel Values	function
CH1	0	RED OFF
	1-255	FROM DARK TO BRIGHT
CH2	0	GREEN OFF
	1-255	FROM DARK TO BRIGHT
CH3	0	BLUE OFF
	1-255	FROM DARK TO BRIGHT
CH4	0	WHITE OFF
	1-255	FROM DARK TO BRIGHT
8CH		
CH	Channel Values	function
CH1	0-255	Total dimming
CH2	0	RED OFF
	1-255	FROM DARK TO BRIGHT
CH3	0	GREEN OFF
	1-255	FROM DARK TO BRIGHT
CH4	0	BLUE OFF
	1-255	FROM DARK TO BRIGHT
CH5	0	WHITE OFF
	1-255	FROM DARK TO BRIGHT
CH6	0-255	Strobe
CH7	0-255	speed slow to quick

CH8	0-50	start CH1-CH6
	51-100	Program selection
	101-150	Program the gradient
	151-200	Program pulse variable
	201-250	The program jump
	251-255	Voice control open

